

2018-06-16

Subject: Procedure of updating database AC device: Alaska Premium/
Premium HFO.





1. After appeared communicate "Now it is available a new database version" should contact with Magneti Marelli Aftermarket.



2. After received new database , copy file 36-cardb.dta (data base on refrigerent r134a) or file 33-cardb.dta (data base on refrigerent 1234yf) on empty Pen drive, and put it to port USB in front display of device. Switch on device in back side of device.



3. After switch on device appeared communicate Password Database should write password from service Magneti Marelli Aftermarket. Password is generating on base serial number of device. Nameplate is stick on back side of device Serial N°



4. Nameplate of AC device. Number need to generate password for e.g.: H1904563.




5. Received password should write and confirm push button: Enter.

*** In AC device Alaska Start HFO/ Alaska Bus confirmation new password is push and hold button Enter by about 6-8 sec when display show wait file loading database.**



6. *Update database, please wait.*

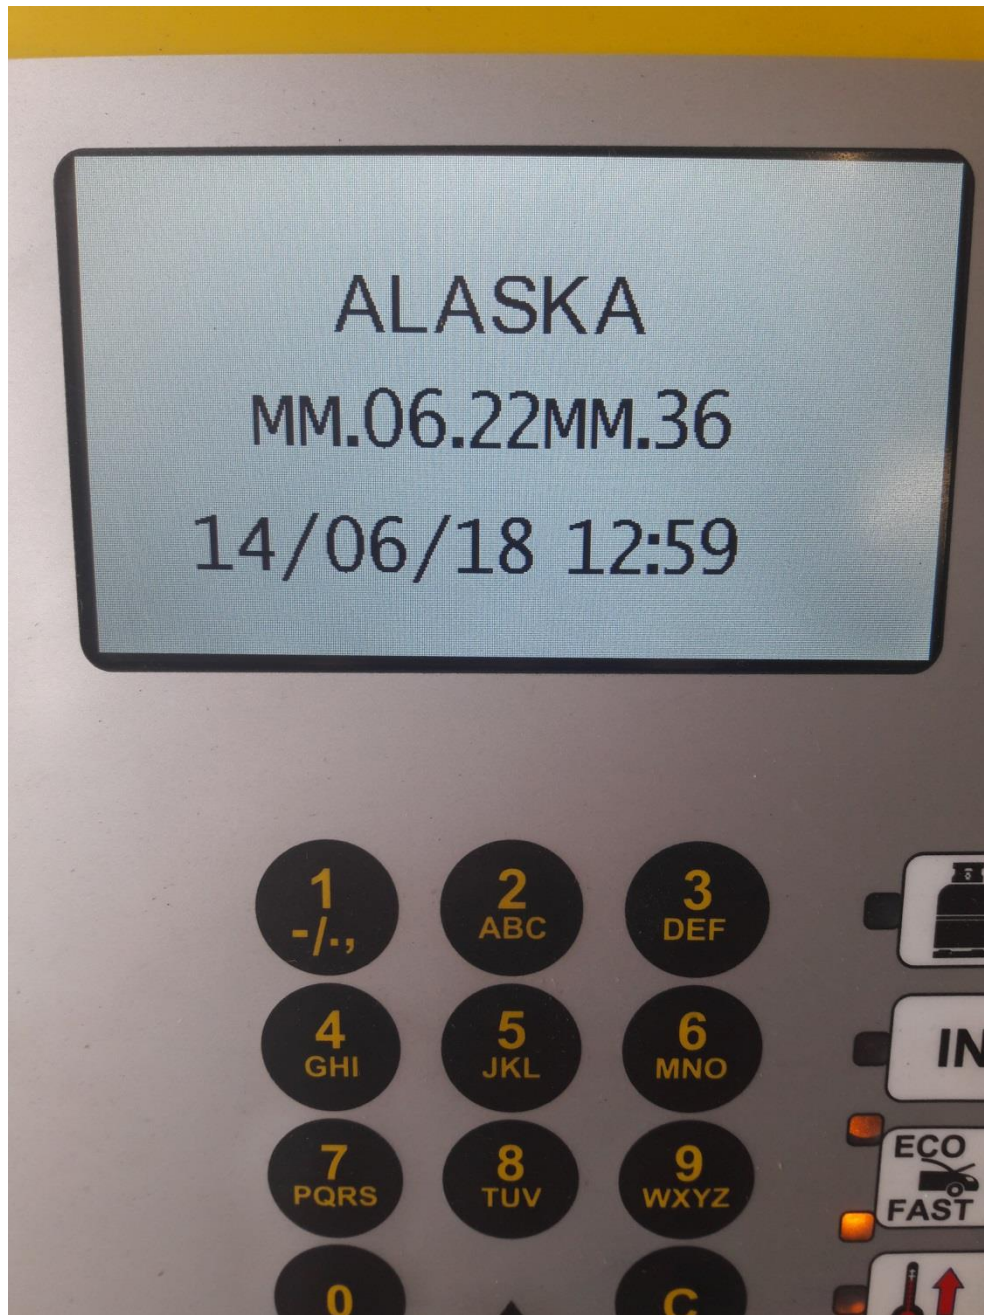

7. Updated new database to the newest number "36" year 2018

If you have any questions, please contact with service Magneti Marelli Aftermarket.

More info you can get from:

Marek Tabaszewski

marek.tabaszewski@magnetimarelli.com

Tel. +48 664 095 718

Krystian Marczewski

krystian.marczewski@magnetimarelli.com

Tel. +48 668 686 120



Magneti Marelli Aftermarket Sp. z o.o.
Plac Pod Lipami 5
40-476 Katowice – Polska
Tel. +48 32 603 61 07 - Fax. +48 32 603 61 08
www.rgz-magnetimarelli.pl